# SELECON PRODUCT SPECIFICATION





## **AXIAL ZOOMSPOT**


A 600W variable beam profile with precise beam control and pattern projection from a high output beam.

Safe and easy to use, the Acclaim Axial Zoomspot offers efficiency, strength and performance with a choice of two beam angle ranges.

#### **FEATURES**


- Available in 18°-34° or 24°-44° beam angles.
- Interchangeable lens tray between Medium and Wide versions.
- Beam adjustable from smooth, flat beam for pattern projections to high intensity peak distribution for stage washes.
- Unique easy to use and precise adjustable beam Peak-Flat mechanism.
- Captive shutters offering wider degree of masking angles.
- Heat control in beam filter.
- Slot provided for Iris or rotatable (35°) pattern holder.
- 'Swing-down' doors for easy access to lens cleaning.
- Mains isolation via micro-switch when back is removed for lamp changes.
- Constructed of pressure die-castings and aluminium extrusion.
- · Fully compliant to CE standards.

#### PHOTOMETRIC DATA



Tests conducted using a standard GKV, 600W, 240V, lamp.

#### PHYSICAL DATA

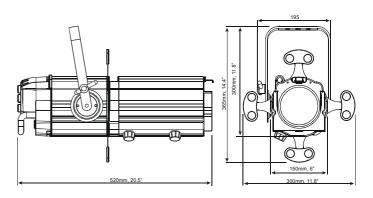

Weight: 5.6kg

Colour Frame Size: 125mm x 125mm

Pattern (Gobo) size: M

Included: 1 x colour frame, 1 x M12 nut &

bolt set, instruction leaflet.

#### LAMPS: 220V-240V

#### <u>600W</u>

**GKV** 15,000 lumens 400 hours average life 13,000 lumens 1500 hours average life

### **ORDER CODES & ACCESSORIES**

Acclaim Axial Zoomspot 18° - 34°	12ACX1834
Acclaim Axial Zoomspot 24° - 44°	12ACX2444
Acclaim Iris	15ACIRIS
Acclaim Rotatable Pattern Holder	15ACGH
Acclaim 18°- 34° Lens Tray	15ACAX1834LT
Acclaim 24°- 44° Lens Tray	15ACAX2444LT
Lens Safety Mesh	15ACSM
Suspension Hookclamp	20HC
Safety Bond	20SC

Selecon reserves the right to change the specifications without notice (09/06).